

USER GUIDE

ANGIE Monitor

COMBO



DEVICE FEATURES:

Dimensions: 88.5×85.3×27 mm.

Battery: 4000 mAh

IP rate: IP67 (Dustproof and waterproof)

1.5 m. cable with magnetic contact switch

Operating temperature: -15°C to +50 °C

Battery life: up to 2 years*

* by messaging once every hour

DESCRIPTION

Angie Monitor Combo is designed to measure temperature and humidity. Magnetic contact switch can be mounted to any door or window to detect an opening or closing event. It is battery charged and does not require a constant power source. Battery level can be monitored on the Angie IoT platform.

Angie Monitor Combo comes in a cardboard box that contains the device with installed battery, assembly kit and detailed used guide.



INSTALLATION


The device can be mounted on a wall using a dowel. Double-sided adhesive tape could be used for the magnetic contact switch.

ATTENTION: The temperature is not the same at all points of the room you are monitoring. Choose a suitable place to mount the Angie Monitor Temperature. We recommend keeping this at eye level. The magnetic contact switch will only work if the distance between the plates is no more than 3mm.

ANGIE PLATFORM ACCESS

Once you have received a username and password on your email, you will be able to access the application from here -> iot.angie.bg or download the app from Google play or Apple Store.

Attach the device to the asset you will be monitoring in the Angie IoT app. From the Home screen select "Create Asset" and follow the steps. Enter the required information and save it. In the Reports menu, you will see a history of measured parameters up to 6 months ago.

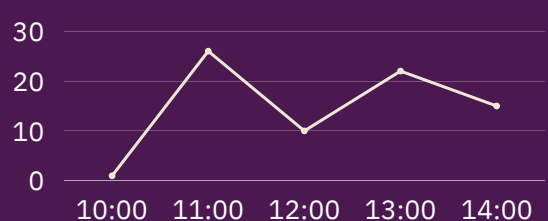

HAVE A QUESTION?

Do not hesitate to contact us

✉ email: support@lorennetworks.com

☎ Phone: +359 885 100 173



Angie IoT

will meet the needs of any industry, any application, any data